

NATIONAL ADVISORY COMMITTEE  
FOR AERONAUTICS

MAILED

OCT 31 1929

TO: *Library: L.M.A.L.*

TECHNICAL NOTES

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

No. 326

WIND TUNNEL PRESSURE DISTRIBUTION TESTS ON  
AN AIRFOIL WITH TRAILING EDGE FLAP

By Carl J. Wenzinger and Oscar Loeser, Jr.  
Langley Memorial Aeronautical Laboratory

~~RECEIVED~~  
To be returned to  
the files of the Langley  
Memorial Aeronautical  
Laboratory

Washington  
October, 1929



NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS.

TECHNICAL NOTE NO. 326.

WIND TUNNEL PRESSURE DISTRIBUTION TESTS ON  
AN AIRFOIL WITH TRAILING EDGE FLAP.

By Carl J. Wenzinger and Oscar Loeser, Jr.

S u m m a r y

This report deals with pressure distribution tests on an airfoil with a conventional trailing edge flap. These tests were conducted in the Atmospheric Wind Tunnel of the National Advisory Committee for Aeronautics.

Maximum chord loadings were obtained with the flap displaced downward and with the airfoil at large angles of attack. Greater changes were produced in the normal force and in the center of pressure travel by up-flap than by an equal down-flap displacement.

Introduction

This investigation was conducted for the purpose of obtaining information on the distribution of pressure for two-dimensional flow over an airfoil equipped with a plain trailing edge flap. The tests were made in the Five-Foot Atmospheric Wind Tunnel (Reference 1) of the Langley Memorial Aeronautical Laboratory.

When a trailing edge flap is displaced from its neutral position, the magnitude and distribution of pressure over both

airfoil and flap are changed. The property of increasing or decreasing lift has resulted in the common use of flaps as ailerons for controlling the attitude, and hence the motion of an airplane in flight. Flaps are also used to a limited extent to obtain lower landing speeds by increasing the maximum lift coefficient of the wing.

To use flaps as control surfaces, it is desirable to know how much control can be obtained by displacing them and also the force required to operate them. For a flap used on a wing to decrease landing speed, in addition to the above information, it is necessary to know how flap displacement affects the balance or "trim" of the airplane.

The foregoing factors can be determined by a study of the normal force characteristics, center of pressure movement, and the moments of the air loads on the flap about the hinge. The results of numerous force tests have already been published, but relatively little information is available from pressure distribution tests. The pressure distribution tests described in this report are a part of a preliminary test program which has been carried out at this laboratory on several different types of flaps.

#### Method of Test and Apparatus

The tests described in this report were made by the so-called "plane flow" method. The test airfoil was mounted between end planes which extended across the tunnel and several chord lengths

fore and aft of the model. Pressures along a section of the airfoil midway between the planes were measured by means of a single row of orifices which were connected to a liquid multiple manometer.

In Figure 1 the airfoil is shown mounted in the wind tunnel. It was arranged so that the angle of attack could be varied from the outside. The airfoil used was the N.A.C.A. 84-M with a 15-inch chord and a length of  $25\frac{1}{2}$  inches. A trailing edge flap, 20 per cent of the chord in width, was hinged as shown in Figure 2. In the construction of the wooden model, the ordinates were kept accurate to within  $\pm 0.020$  inch of those specified in Table I. The pressure orifice positions along the chord are given in Table II and Figure 2.

Tubes from the orifices were brought out through the lower end of the airfoil and connected to the liquid multiple manometer. This manometer, shown in Figure 3, has the tubes spaced proportionately to the orifice positions on the airfoil. Using this arrangement, photostat records were taken of the liquid heights for each angle of attack and flap setting. On the photostats, curves were faired through the menisci of the indicating liquid, producing the type of diagram shown in Figure 4. Here the horizontal line indicates the value of the static pressure in the wind tunnel test section.

The tests were made at a dynamic pressure of 4.09 lb. per sq.ft., corresponding to a velocity of about 40 m.p.h., and a

Reynolds Number of 455,000.

## R e s u l t s

The data obtained from the tests are presented in graphical form as follows:

Figure 5-A. Isometric chord load diagram versus angle of attack (flap  $30^\circ$  up).

5-B. (Flap  $15^\circ$  up)

5-C. (Flap  $0^\circ$ )

5-D. (Flap  $15^\circ$  down)

5-E. (Flap  $30^\circ$  down)

Figure 6. Normal force coefficient versus angle of attack (flap angles constant).

Figure 7. Normal force coefficient versus flap angle (angles of attack constant).

Figure 8. Center of pressure coefficient versus angle of attack (flap angles constant).

Figure 9. Center of pressure coefficient versus flap angle (angles of attack constant).

Figure 10. Hinge moment coefficient versus flap angle (angles of attack constant).

The normal force and center of pressure data were obtained by integration of the photostat pressure diagrams for area and for moment about the leading edge. The hinge moment data were obtained by integration of the flap portion of the diagrams for moment about the hinge line.

The various coefficients were computed as follows, all factors

being in consistent units:

(1) Normal force coefficient ( $C_{NF}$ ):

$$C_{NF} = \frac{A}{q c}$$

where

A = area of the pressure diagram,

c = chord,

q = dynamic pressure, expressed as a head of the manometer liquid.

(2) Center of pressure coefficient ( $C_P$ ):

$$C_P = \frac{M}{A c}$$

where

M = moment about the leading edge.

(3) Hinge moment coefficient ( $C_h$ ):

$$C_h = \frac{M_H}{q c^2}$$

where

$M_H$  = moment about the flap hinge.

The coefficients of normal force and center of pressure may be relied upon to an accuracy of about  $\pm 3$  per cent. However, due to the small number of pressure orifices in the flap which made fairing of the pressure diagrams somewhat uncertain, the hinge moment coefficients can only be depended upon for an accuracy of about  $\pm 15$  per cent.

## D i s c u s s i o n

Since the tests were made using a two-dimensional air flow, the results should be considered on the basis of an airfoil of practically infinite aspect ratio. Application of the results to airfoils of finite aspect ratio with either ailerons or flaps would require the use of correction factors such as those given in References 2, 3, and 4. Scale effect should also be considered, due to the tests having been made at the relatively low Reynolds Number of 455,000.

However, the general effects of the results of the tests on an airfoil with 20 per cent flap are indicated by the diagrams and curves. The isometric pressure diagrams are of particular interest because they show the manner in which the air loads along the chord of the airfoil change with flap displacement and with angle of attack. The peaks of the loads occur at the leading edge as in the case of a plain airfoil but, in general, greater loads act near the trailing edge as a result of the flap displacement. These latter loads also reverse their direction of application, depending upon whether the flap is displaced upwards or downwards from the neutral position.

The curves of normal force, center of pressure, and hinge moment coefficients, were included as characteristics of the particular airfoil and flap combination.

## C o n c l u s i o n s

1. Maximum chord loadings are obtained at large angles of attack and with the flap displaced in the downward direction.

2. In general, upward movement of the flap produces greater changes in the  $C_{NF}$  and in the C.P. travel than downward movement of the same magnitude. Greater hinge moments, however, are obtained with the flap displaced downward.

Langley Memorial Aeronautical Laboratory,  
National Advisory Committee for Aeronautics,  
Langley Field, Va., August 8, 1929.

## References and Bibliography

- Reference 1. Reid, Elliott G. : Standardization Tests of  
N.A.C.A. No. 1 Wind Tunnel.  
N.A.C.A. Technical Report No.  
195, 1924.
- Reference 2. Wieselsberger, C. : Theoretical Investigation of  
the Effect of the Ailerons on  
the Wing of an Airplane.  
N.A.C.A. Technical Memorandum  
No. 510, 1929. (From Report of  
the Aeronautical Research In-  
stitute, Tokyo Imperial Univer-  
sity, 1927.)
- Reference 3. Glauert, H. : Theoretical Relationship for an  
Aerofoil with Hinged Flap.  
British A.R.C. Reports and Mem-  
oranda No. 1095, April, 1927.
- Reference 4. Munk, Max M. : On the Distribution of Lift  
Along the Span of an Airfoil  
with Displaced Ailerons.  
N.A.C.A. Technical Note No. 195,  
1924.



- Bacon, David L. : The Distribution of Lift Over Wing Tips and Ailerons. N.A.C.A. Technical Report No. 161, 1923.
- Fairbanks, A. J. : Distribution of Pressure Over Model of the Upper Wing and Aileron of a Fokker D-VII Airplane. N.A.C.A. Technical Report No. 254, 1927.
- Hoot, H. I. : The Effect of Airfoil Thickness and Plan Form on Lateral Control. N.A.C.A. Technical Report No. 169, 1923.
- Norton, F. H.  
and : Pressure Distribution Over the Rudder and  
Brown, W. G. : Fin of an Airplane in Flight. N.A.C.A. Technical Report No. 149, 1922.
- Higgins, George J.  
and : The Effect of a Flap and Ailerons on the  
Jacobs, Eastman N. : N.A.C.A. M-6 Airfoil Section. N.A.C.A. Technical Report No. 260, 1927.
- Wieselsberger, C. : Determination of the Air Forces and Moments  
and : Produced by the Ailerons of an Airplane.  
Asano, T. : N.A.C.A. Technical Memorandum No. 488, 1928. (From Zeitschrift für Flugtechnik und Motorluftschiffahrt, July 14, 1928).
- Knight, Montgomery  
and : Wind Tunnel Tests on a Series of Wing Models Through a Large Angle of Attack Range.  
Wenzinger, Carl J. : Part I: Force Tests. N.A.C.A. Technical Report No. 317, 1929.

TABLE I.

## N.A.C.A. 84-M Airfoil Ordinates

15-inch chord model

| Station in<br>per cent of chord | Ordinate<br>upper surface<br>per cent of chord | Ordinate<br>lower surface<br>per cent of chord |
|---------------------------------|--|--|
| 0.000                           | 2.920  | 2.920  |
| 1.000                           | 4.947  | 1.366  |
| 2.000                           | 5.920  | 0.858  |
| 4.000                           | 7.390  | 0.333  |
| 6.000                           | 8.450  | 0.087  |
| 8.000                           | 9.320  | 0.000  |
| 10.000                          | 10.090   | 0.000  |
| 12.000                          | 10.750   | 0.000  |
| 16.000                          | 11.930   | 0.000  |
| 20.000                          | 12.855   | 0.000  |
| 25.000                          | 13.675   | 0.000  |
| 30.000                          | 14.160   | 0.000  |
| 40.000                          | 14.475   | 0.000  |
| 50.000                          | 13.920   | 0.000  |
| 60.000                          | 12.425   | 0.000  |
| 70.000                          | 10.250   | 0.000  |
| 80.000                          | 7.580  | 0.000  |
| 90.000                          | 4.285  | 0.000  |
| 95.000                          | 2.606  | 0.000  |
| 99.000                          | 0.993  | 0.000  |
| 100.00                          | 0.253  | 0.253  |

TABLE II.

## Orifice Locations

N.A.C.A. 84-M Airfoil with Flap

15-inch chord model

| U p p e r |                             | L o w e r |                             |
|-----------|-----------------------------|-----------|-----------------------------|
| No.       | Per cent chord<br>from L.E. | No.       | Per cent chord<br>from L.E. |
| —         | 0.00                        | 1         | 0.00                        |
| 2         | 3.75                        | 3         | 5.60                        |
| 4         | 8.59                        | 5         | 10.60                       |
| 6         | 15.89                       | 7         | 18.06                       |
| 8         | 29.02                       | 9         | 31.30                       |
| 10        | 46.46                       | 11        | 48.85                       |
| 12        | 66.75                       | 13        | 68.60                       |
| 14        | 77.75                       | 15        | 75.90                       |
| 16        | 86.45                       | 17        | 84.60                       |
| 18        | 100.00                      | —         | 100.00                      |

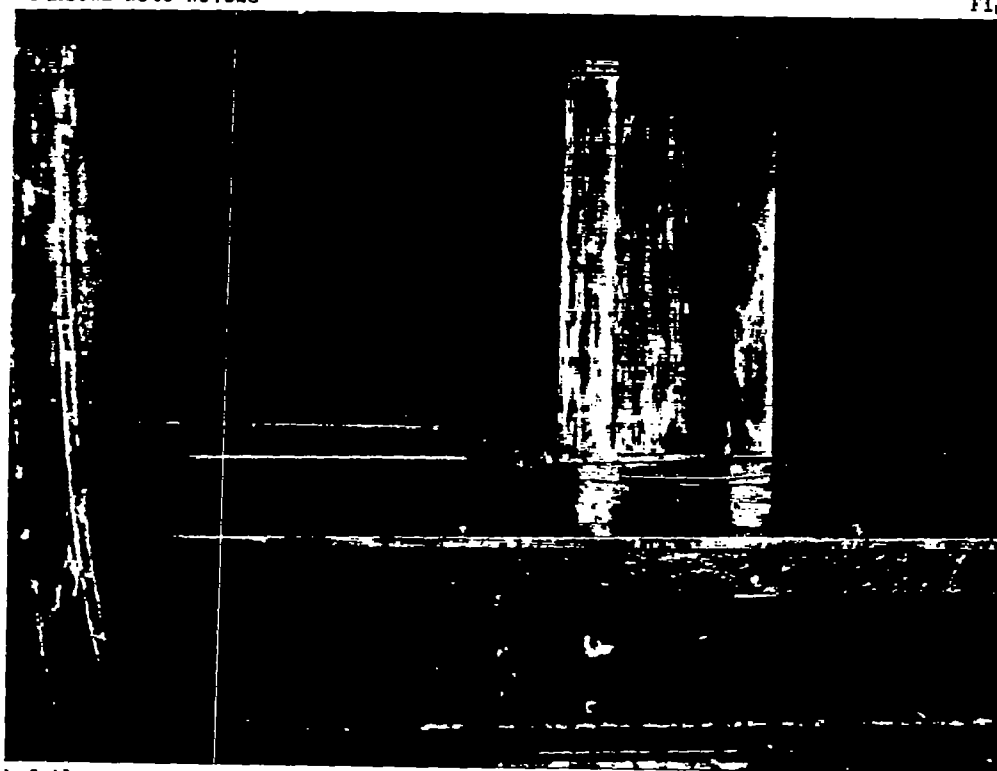


Fig. 1 Airfoil mounted on plane flow apparatus.

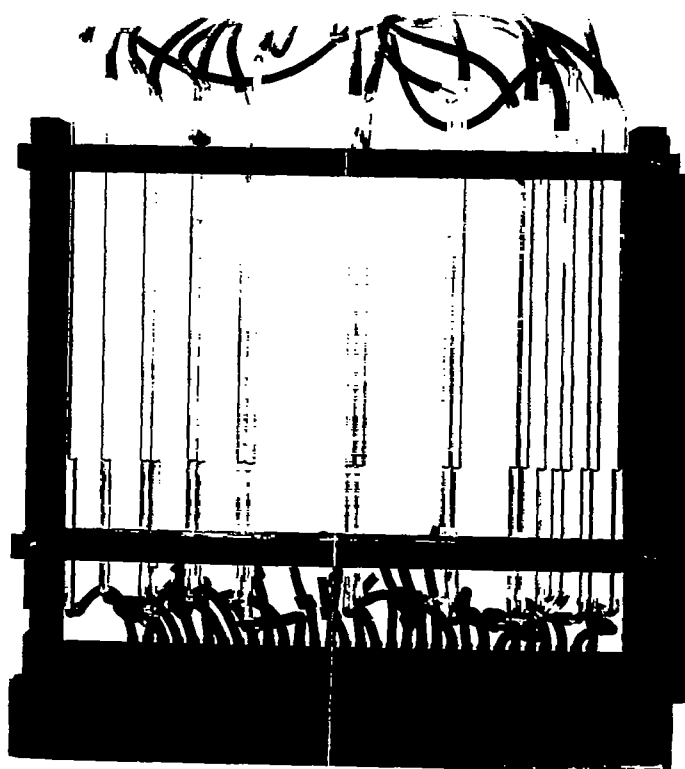


Fig. 3 Liquid multiple manometer.

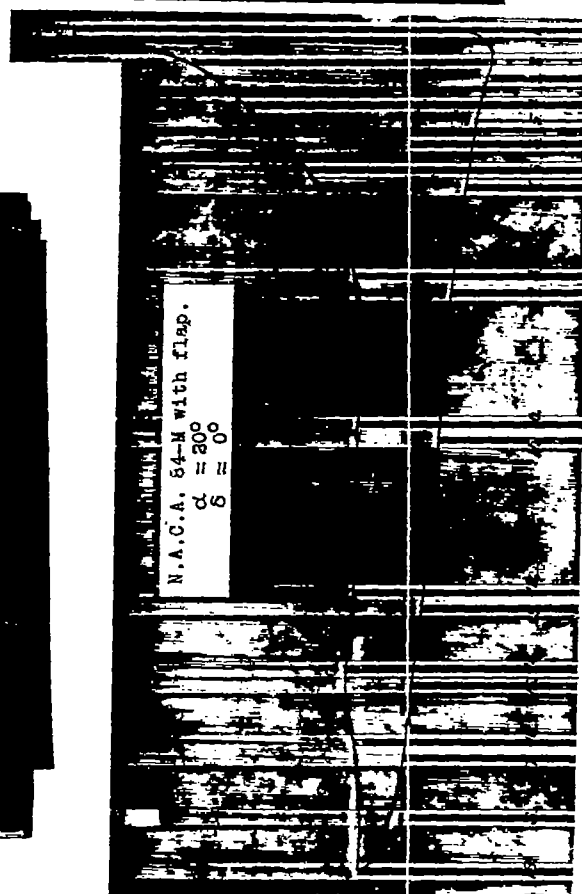


Fig. 4 Specimen photostat pressure record.

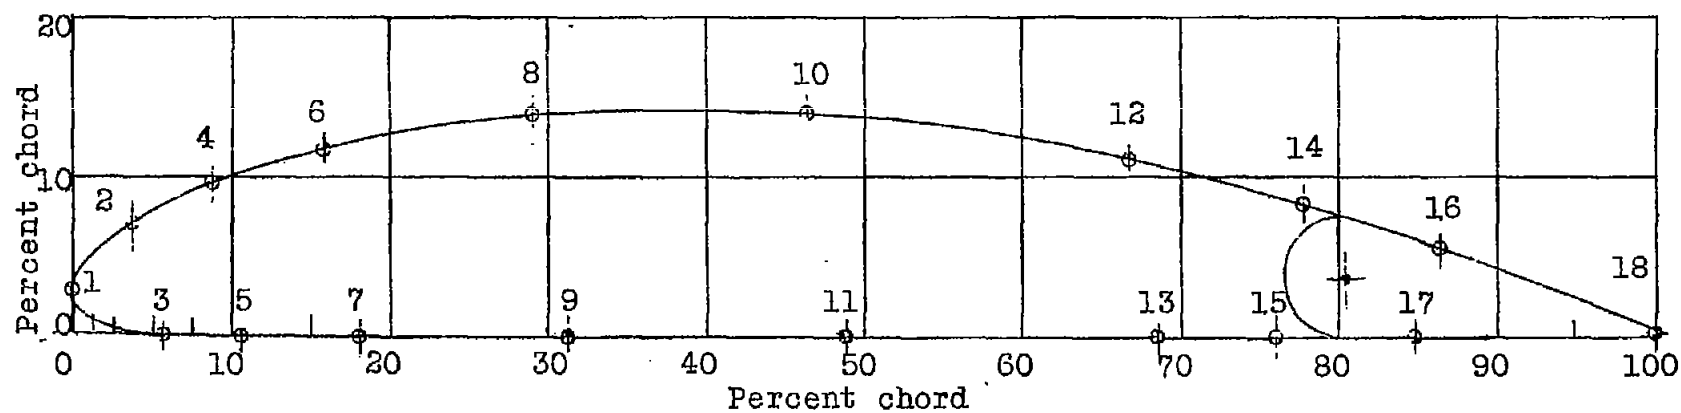
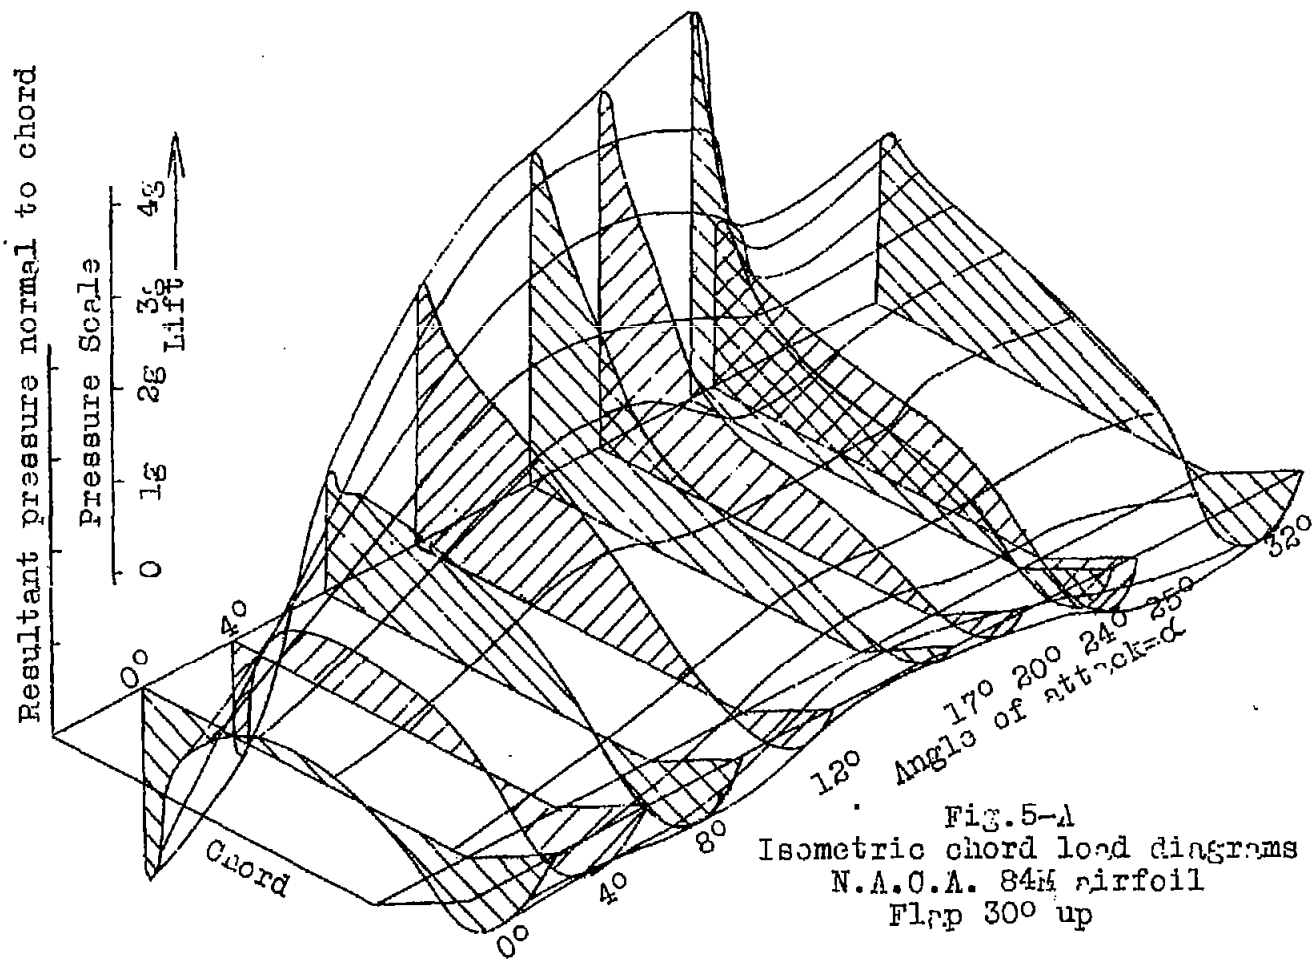


Fig.2 N.A.C.A. 84M profile showing  
flap and orifices.  
15 in. chord model.



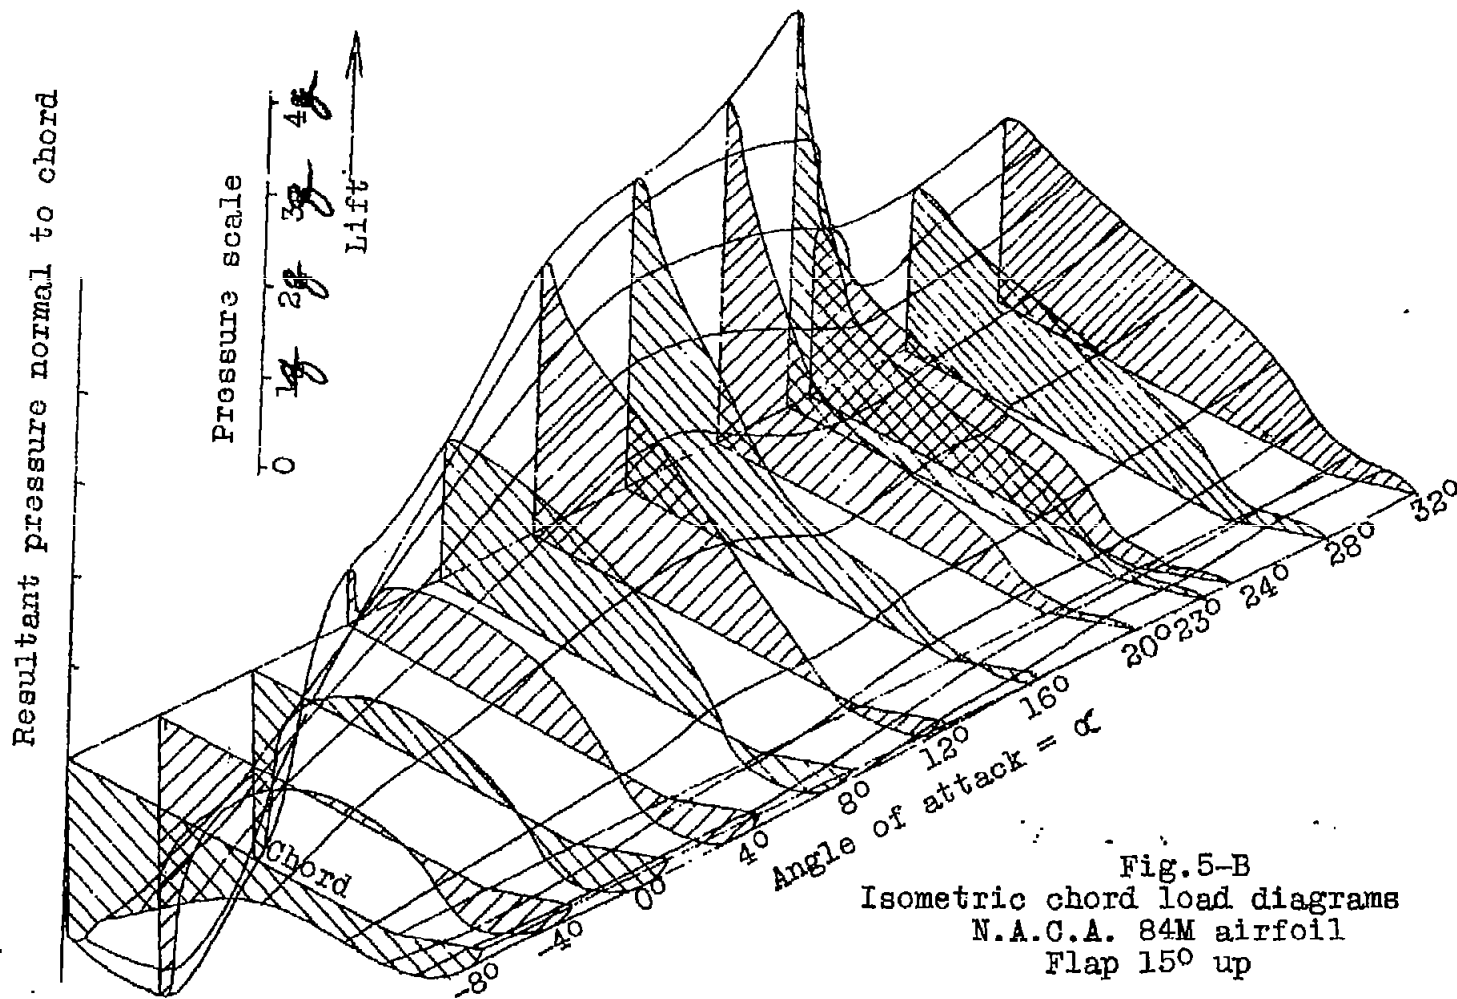


Fig. 5-B  
Isometric chord load diagrams  
N.A.C.A. 84M airfoil  
Flap 15° up

